



# Humble Canal Hydrologic Restoration (ME-11)

## Project Status

**Approved Date:** 1999      **Project Area:** 4,030 acres  
**Approved Funds:** \$2 M      **Total Est. Cost:** \$2 M  
**Net Benefit After 20 Years:** 378 acres  
**Status:** Completed June 1998  
**Project Type:** Hydrologic Restoration  
**PPL #:** 8

## Location

The project is located in the Mermentau basin, on the west bank of the Mermentau River approximately 2 miles southwest of Grand Lake at the Humble Canal in Cameron Parish, Louisiana.

## Problems

The Grand and White Lakes system has been maintained as a fresh-to-intermediate marsh environment. This has been accomplished through water management using natural ridges, levees, locks, and water control structures. This project replaces the Humble Canal structure that has fallen into disrepair. This project is compatible with the overall basin strategy of treating critical areas of marsh loss within the interior of the basin and managing water levels with structures to relieve stress on interior wetlands. The project also relieves this area from continued saltwater intrusion from the Mermentau River that threatens the viability of the fresh to intermediate marshes within the region.

## Restoration Strategy

The objective of this project is to restore historical hydrology to the project area by constructing a water control structure consisting of five 48-inch diameter by 50-foot long corrugated aluminum pipes with flap gates and weir drop inlets along with one 18-inch diameter corrugated aluminum pipe with screw gate. This structure will protect the area from Mermentau River saltwater intrusion and allow high water to drain from the marsh to the river. Dredging of a small waterway is included to increase the effectiveness of the structure.



Marsh located in the interior of the project area is experiencing critical loss. Project features will help to restore historical patterns of freshwater flow, which will decrease marsh loss by stabilizing water flow patterns and salinity.

## Progress to Date

Construction of the project was completed March 5, 2003. The project is now in the operation and maintenance phase.

This project is on Priority Project List 8.

*For more information, please contact:*





**Federal Sponsor:**  
 Natural Resources Conservation Service  
 Alexandria, LA  
 (318) 473-775



**Local Sponsor:**  
 Coastal Protection and Restoration Authority  
 Baton Rouge, LA  
 (225) 342-4736

# Humble Canal Hydrologic Restoration (ME-11)

 Water Control Structure  
 Dredge Channel  
 Project Boundary

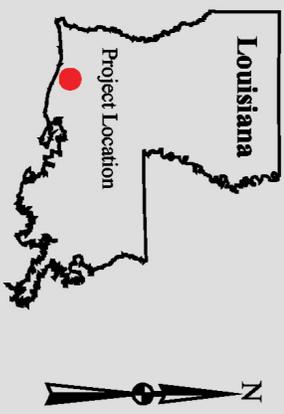

Map Produced By:  
 U.S. Department of the Interior  
 U.S. Geological Survey  
 National Wetlands Research Center  
 Coastal Restoration Field Station

Background Imagery:  
 1998 Digital Orthophoto Quarter Quadrangle  
 Map Date: July 28, 2003  
 Map ID: USGS-NWRC 2003-11-097  
 Data accurate as of: April 4, 2003