Louisiana Coastal Wetlands Conservation and Restoration Task Force October 2018



# Cole's Bayou Marsh Restoration (TV-63)

## **Project Status**

Approved Date:2012Project Area:3,840 acresApproved Funds:\$25 MTotal Est. Cost:\$26 MNet Benefit After 20 Years:340 acresStatus:Engineering and DesignProject Type:Marsh Creation and Hydrologic RestorationPPL #:21

## Location

This project is located in Region 3, Teche/Vermilion Basin, Vermilion Parish, east of Freshwater Bayou Canal.


## **Problems**

Project area wetlands are undergoing loss at -0.42 %/ year based on 1983 to 2011 USGS data from the extended boundary. Wetland loss processes in this area include subsidence/sediment deficit, interior ponding and pond enlargement, and storm impacts resulting in rapid episodic losses. In addition, significant interior marsh loss has resulted from salt water intrusion and hydrologic changes associated with increasing tidal influence. As hydrology in this area has been modified, habitats have shifted to more of a floatant marsh type, resulting in increased susceptibility to tidal energy and storm damages. Habitat shifts and hydrologic stress reduce marsh productivity, a critical component of vertical accretion in wetlands.

## **Restoration Strategy**

The specific project goals are: 1) create and nourish 415 acres of brackish marsh in recently formed shallow open water and 2) increase freshwater and sediment inflow into interior wetlands by improving project area hydrology.

The project will create and nourish 415 acres of brackish marsh via dedicated dredging from Vermilion Bay and placement in three confined disposal areas. Containment dikes will be degraded or gapped to establish tidal connection and functions. A total of nine water control structures consisting of 22 culverts will be installed throughout the project area. Freshwater, nutrients, and sediment inflow from the Freshwater Bayou Channel to interior marshes will be re-established by dredging and reconnecting Cole's Bayou to interior wetlands.

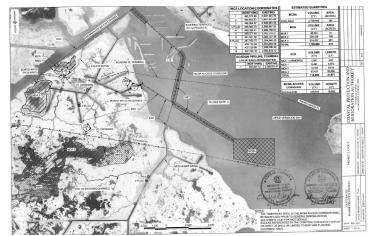

The design plan for the project.

A one-way flow through system would be established. The culverts located on the northern project boundary will allow ingress of sediment, nutrients, water, and fisheries organisms into the semi-impounded project area. Culverts along the southern project boundary will be for water drainage and egress of fisheries organisms out of the marsh.

## **Progress to Date**

The project was authorized for engineering and design on Priority Project List 21. The project was authorized for construction in January 2016. In July 2018, a construction contract was awarded to Great Lakes Dredge and Dock, LLC in the amount of \$12,387,446. Construction is estimated to be completed in the spring of 2019.

For more information, please contact:



Federal Sponsor: National Marine Fisheries Service Baton Rouge, LA (225) 389-0508

Local Sponsor: Coastal Protection and Restoration Authority Baton Rouge, LA (225) 342-4733

