
## GENERAL NOTES:

- 1. EXACT LOCATION OF ALL PLANTS SHALL BE DETERMINED ON SITE BY DNR/CRD DURING PRECONSTRUCTION LAYOUT.
- 2. THE TOP OF THE SMOOTH CORDGRASS **AND SALT GRASS** ROOT MEDIA SHALL BE PLACED ONE INCH BELOW NORMAL GROUND. THE SEA OATS, MATRIMONY VINE, MARSHHAY CORDGRASS, GULF CORDGRASS AND BITTER PANICUM ROOT MEDIA SHALL BE PLANTED A MINIMUM OF 2" AND MAXIMUM OF 4" BELOW NORMAL GROUND.
- 3. ONE FERTILIZER TABLET SHALL BE PLACED WITHIN TWO (2) TO FOUR (4) INCHES OF THE SIDE OF EACH PLANT AS SPECIFIED.
- 4. ALL DISTANCE MEASUREMENTS SHOWN ON THE PLANS ARE APPROXIMATE.
- 5. NO EQUIPMENT MAY ALTER THE EXISTING CONDITIONS OF THE ISLAND OR DISTURB EXISTING VEGETATION.
- 6. CONTAINMENT DIKE NOT MAINTAINED AND IS SUBJECT TO DEGRADATION.

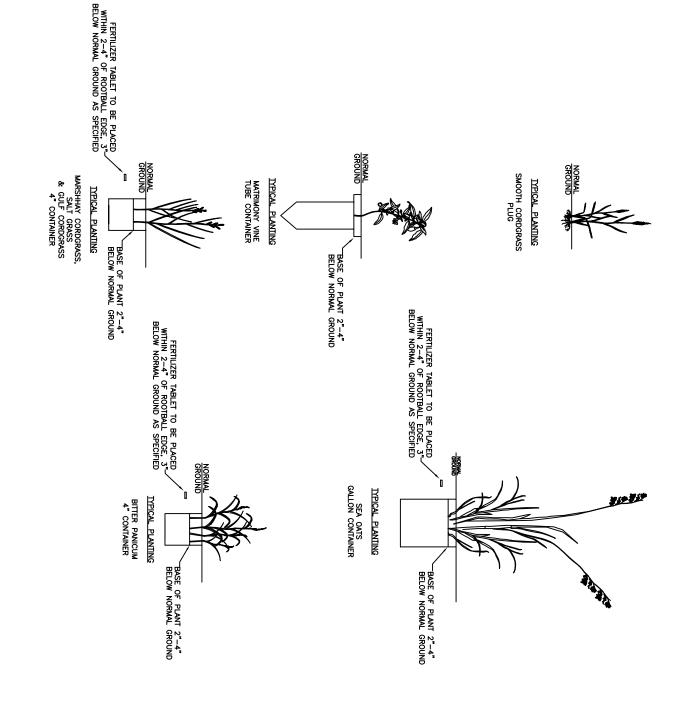

1	20		Г	П		٦		_	
-	REV. DATE								
	DATE								
	DESCRIPTION								
	вү								
	DRAWN BY: K. LOVELL		LOUISIANA DEPARTMENT OF NATURAL RESOURCES COASTAL ENGINEERING DIVISION 617 NORTH JRD STREET BATON ROUGE, LOUISIANA 70802						
	DESIGNED BY:								
	APPROVED BY: K. BAHLINGER	FEDERAL PROJECT NUMBER:		STATE PROJECT NUMBER: BA-38		CHALAND HEADLAND RESTORATION VEGETATIVE PLANTINGS PROJECT		CHALAND HEADLAND RESTORATION	
	SHEET 6 OF 6	DATE: NOVEMBER 2003	DATE: NOVEMBER 2003		GENERAL NOTES				