

Appendix F
Mississippi River Stage Elevation 1951 to 2004

TABLE F-1
Mississippi River Stage Elevation

Month	Mean			Minimum			Maximum		
	Average	Minimum	Maximum	Average	Minimum	Maximum	Average	Minimum	Maximum
January	12.3	8.5	16.3	1.4	0.6	2.1	27.2	21.6	30.1
February	14.4	10.3	18.4	3.3	1.1	5.1	28.3	25.5	29.3
March	17.9	13.6	21.8	4.8	3.0	5.6	27.9	23.9	32.0
April	19.3	16.2	22.2	5.2	4.2	7.0	30.4	28.9	32.0
May	18.2	14.4	21.8	6.4	3.2	9.0	30.1	28.6	33.1
June	14.9	11.2	18.8	2.0	0.6	3.4	29.0	24.7	33.1
July	9.6	6.2	13.5	1.1	0.5	1.8	19.1	16.0	24.9
August	6.2	4.6	8.2	1.5	0.9	2.2	21.3	20.3	22.1
September	5.0	3.8	6.6	2.3	1.4	2.9	14.9	12.9	20.0
October	5.6	3.9	7.5	1.9	1.2	2.3	16.7	11.7	22.5
November	6.7	4.6	9.6	1.9	0.6	2.7	19.1	17.7	22.6
December	10.8	7.4	14.2	1.8	0.6	3.1	25.0	20.9	27.2

^aBased on U.S. Army Corps of Engineers stage data from Donaldsonville from 1954 to 2003.

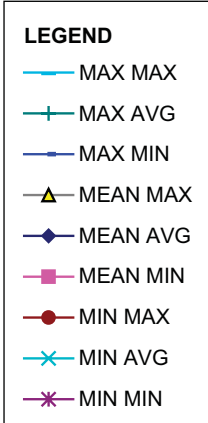
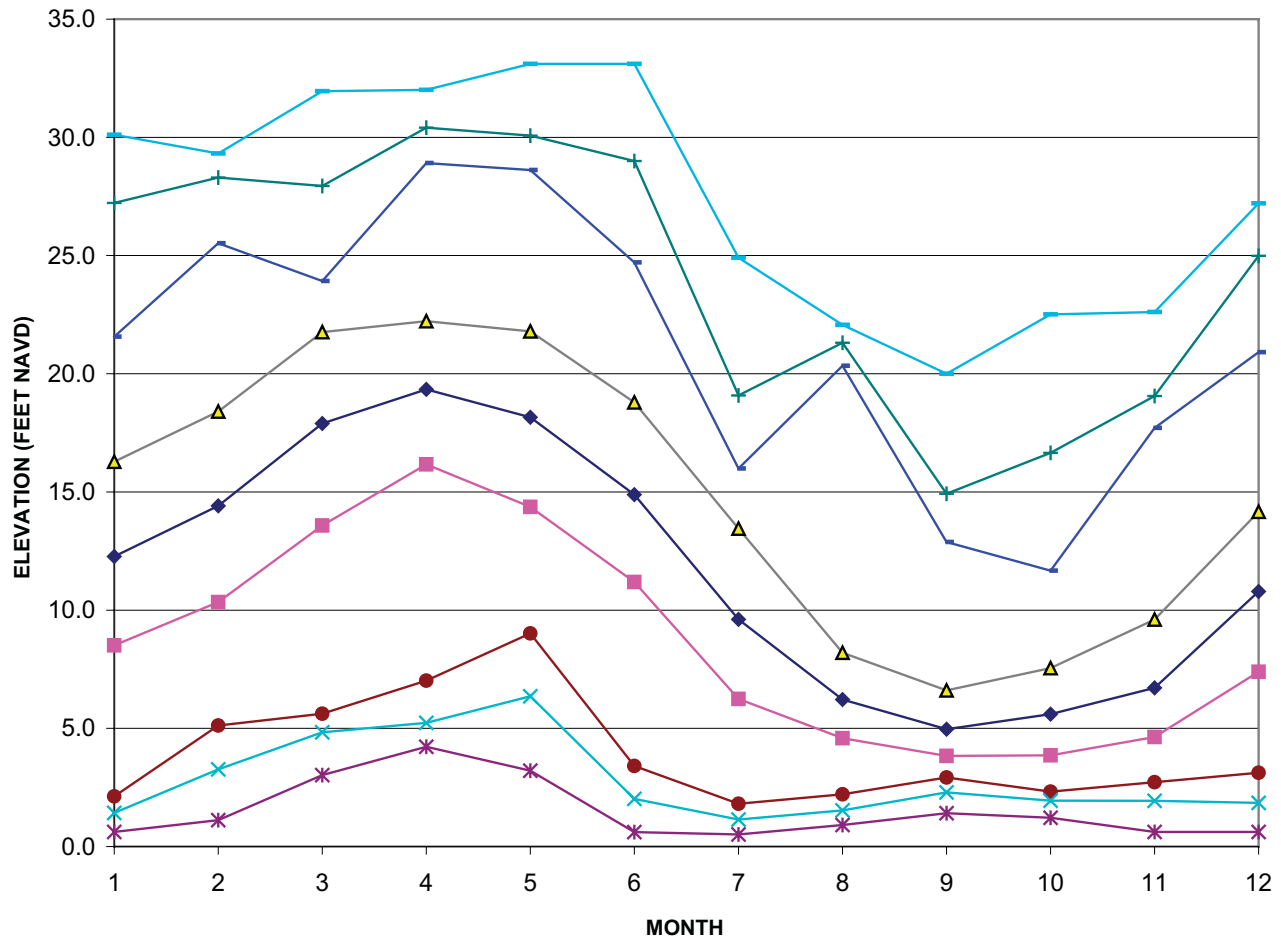


FIGURE F-1
MISSISSIPPI RIVER STAGE ELEVATIONS
AT DONALDSONVILLE, 1951 TO 2004
 MISSISSIPPI RIVER REINTRODUCTION INTO BAYOU LAFOURCHE
 LOUISIANA DEPARTMENT OF NATURAL RESOURCES
 PHASE 1 DESIGN REPORT