



Lost Lake Marsh Creation and Hydrologic Restoration (TE-72)

Project Status

Approved Date: 2010 **Project Area:** 7,312 acres

Approved Funds: \$31 M **Total Est. Cost:** \$34 M

Net Benefit After 20 Years: 452 acres

Status: Completed

Project Type: Marsh Creation

PPL #: 19

Location

The project is located in the Terrebonne Basin, Terrebonne Parish, near the vicinity of Lost Lake.

Problems

Significant marsh loss has occurred between Lake Pagie to the point that little structural framework remains between the lake and Bayou DeCade. North and west of Lost Lake, interior marsh breakup has resulted in large, interior ponds where wind/wave energy continues to result in marsh loss.

Restoration Strategy

The original marsh creation feature consisted of approximately 465 acres around Lake Pagie, north of Bayou DeCade, and along the northwestern Lost Lake shoreline. A favorable construction bid allowed an initial 245-acre marsh creation expansion with a portion of the remaining construction funds. Additional funding from the Louisiana Department of Natural Resources, Louisiana Oil Spill Coordinator's Office, and an overestimation of dredged material quantities allowed for further project expansion. The marsh creation restored/protected some key features of structural framework (i.e., lake rim and bayou bank) within the area and connected to one of the marsh creation cells recently constructed under the North Lake Merchant Landbridge Restoration Project (TE-44). In total, over 1,100 acres of marsh were created/nourished. In addition, 30,000 linear feet (26 acres) of terraces were constructed to reduce fetch in an area of deteriorated marsh north of Bayou DeCade.

Four fixed-crest weirs along Big Carencro Bayou and Rice Bayou were replaced with variable-crest structures. At certain times of the year, Big Carencro Bayou is an excellent source of fresh water and sediment from the Atchafalaya River/Four League Bay system. However, delivery of that water into the marshes west of Lost Lake has been limited

by fixed-crest weirs. Structures with bays/gates were installed to increase freshwater and sediment delivery into those marshes. A similar structure was also installed along Little Carencro Bayou to increase freshwater and sediment delivery into the marshes north of Lost Lake.



TE-72 marsh creation cells along Bayou DeCade. Recent vegetative growth can be seen on some of the newly-deposited dredged material in this December 2019 photo.

Progress to Date

This project was approved for Phase I on January 20, 2010. Phase II Construction was approved on January 24th, 2013. Project construction was completed on November 2018. In January 2021, vegetative plantings were installed in the marsh creation cell along the northwestern Lost Lake shoreline to address an area of erosion. The project is now in the OM&M phase.

This project is on Priority Project List 19.

For more information, please contact:





Federal Sponsor:
U.S. Fish and Wildlife Service
Lafayette, LA
(337) 291-3100



Local Sponsor:
Coastal Protection and Restoration Authority
Baton Rouge, LA
(225) 342-4733

Lost Lake Marsh Creation and Hydrologic Restoration (TE-72)

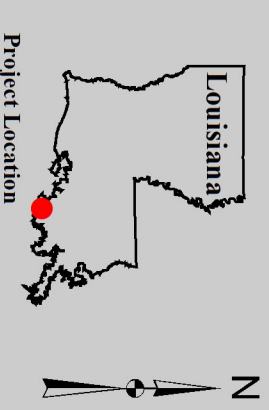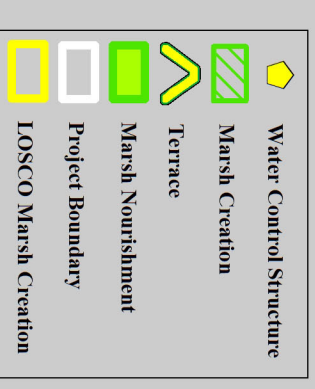

Map Produced by:
U.S. Department of the Interior
U.S. Geological Survey
Wetlands and Aquatic Research Center
Coastal Restoration Assessment Branch
Baton Rouge, La.

Background Imagery:
2019 NAIP Photography

Map Date: September 30, 2020
Map ID: USGS-NWRC 2020-11-0041
Data accurate as of: September 23, 2020

